




CFD13361 Series




Size	Ø133X 61mm
Impeller	Plastic PP
Motor	DC Brushless External Rotor Motor
Insulation	Class B
Technical Features	Control input 0-10VDC/PWM, Tach output, Locked rotor protection, reverse polarity, Current limited, soft start
Weight	0.74kg

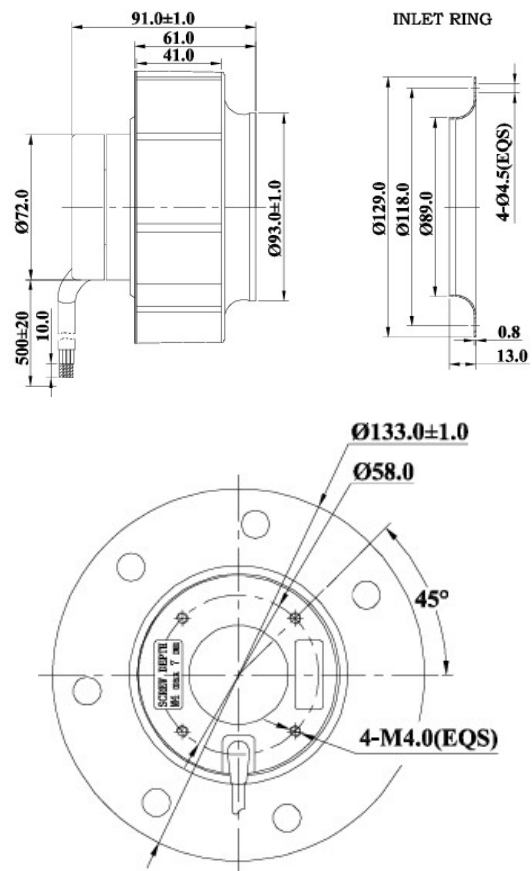


Model Number	Voltage	Operating Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)
CFD13361V12BHWBPB	12	9.4 ~ 14.4	2.7	32.4	4000	210.6	39.39	65
CFD13361V24BHWBPB	24	16 ~ 28	1.6	38.4	4000	210.6	39.39	65
CFD13361V48BHWBPB	48	36 ~ 56	0.8	38.4	4000	210.6	39.39	65

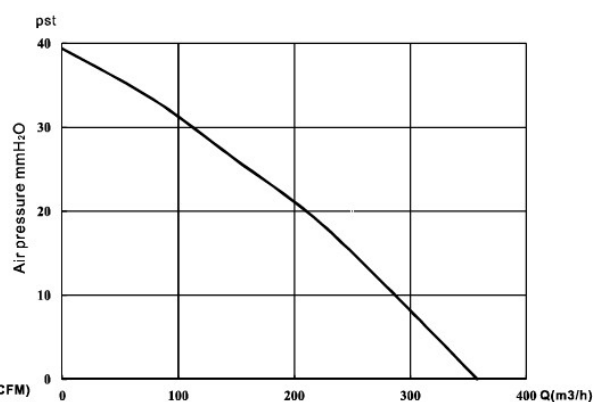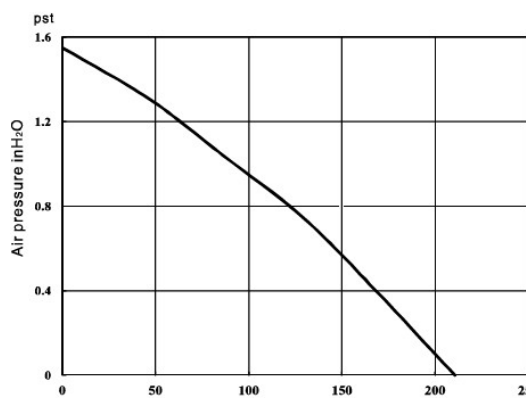



CFD13562 Series

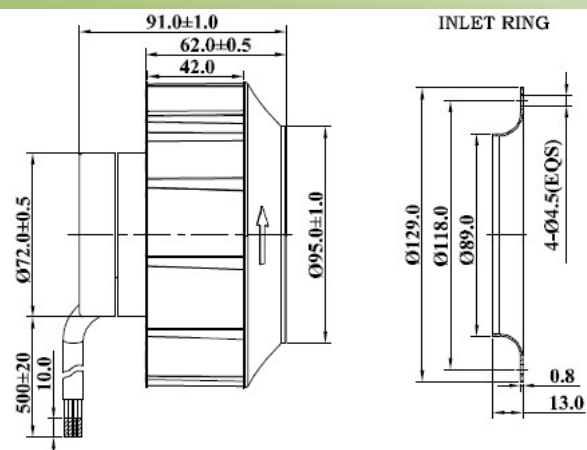

Size	Ø135X 62mm
Impeller	Plastic PA66+GF
Motor	DC Brushless External Rotor Motor
Insulation	Class B
Technical Features	Control input 0-10VDC/PWM, Tach output, Locked rotor protection, reverse polarity, Current limited, soft start
Weight	0.74kg

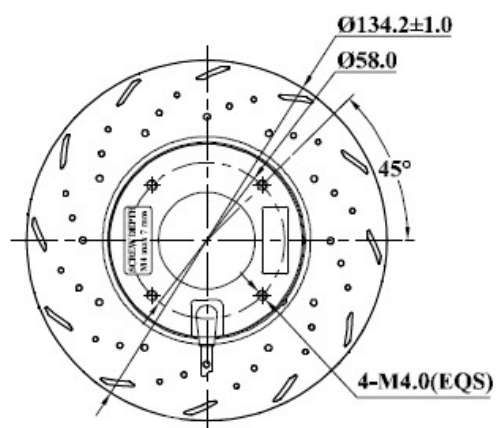


Model Number	Voltage	Operating Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)
CFD13562V12BHWPB	12	9.6 ~ 14.4	2.8	33.6	3000	308	33.17	62
CFD13562V24BHWPB	24	16 ~ 28	2.3	55.2	3300	339.4	39.56	64
CFD13562V24BHWPB	24	16 ~ 28	3	72	3800	399	49.04	70.5
CFD13562V48BHWPB	48	36 ~ 56	1.2	57.6	3300	339.4	39.56	64
CFD13562V48BHWPB	48	36 ~ 56	2.2	105.6	4200	431.2	60.26	73

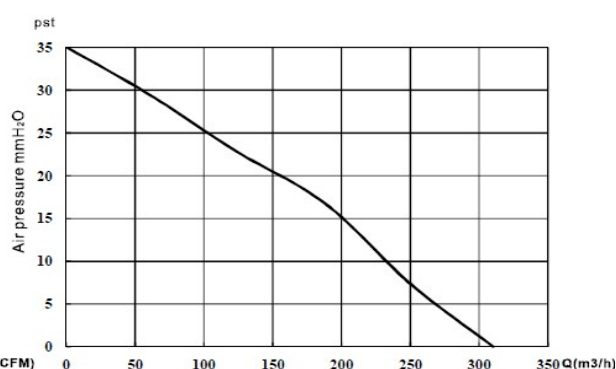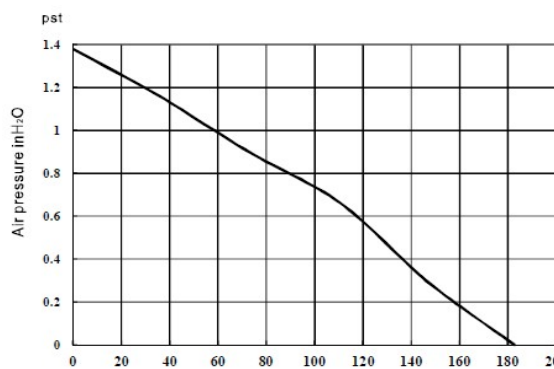



CFD17562 Series




Size	Ø175X 62mm
Impeller	Plastic PA66
Motor	DC Brushless External Rotor Motor
Insulation	Class B
Technical Features	Control input 0-10VDC/PWM, Tach output, Locked rotor protection, reverse polarity, Current limited, soft start
Weight	0.77kg

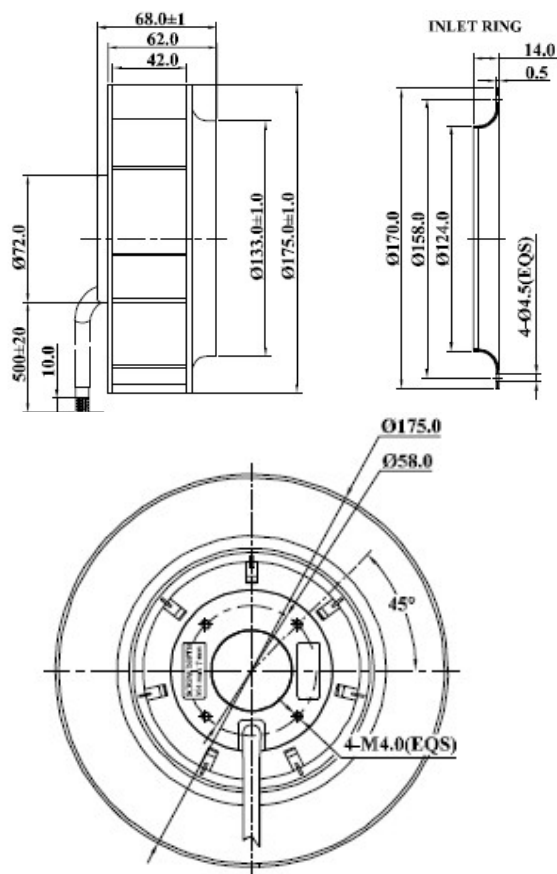


Model Number	Voltage	Operating Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)
CFD17562V12BHWPB	12	9.6 ~ 14.4	2.8	33.6	3000	308	33.17	62
CFD17562V24BHWPB	24	16 ~ 28	2.3	55.2	3300	339.4	39.56	64
CFD17562V24BHWPB	24	16 ~ 28	3	72	3800	399	49.04	70.5
CFD17562V48BHWPB	48	36 ~ 56	1.2	57.6	3300	339.4	39.56	64
CFD17562V48BHWPB	48	36 ~ 56	2.2	105.6	4200	431.2	60.26	73

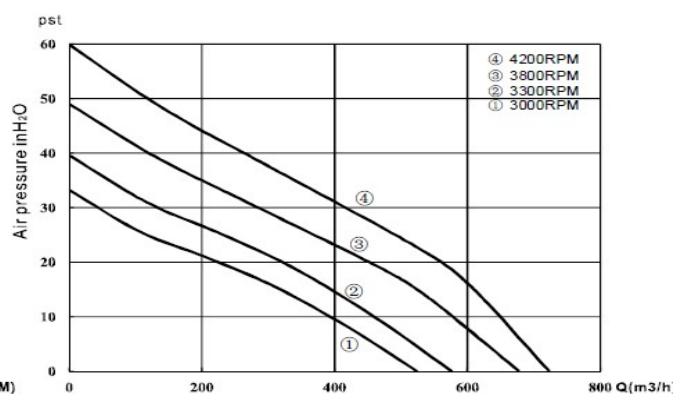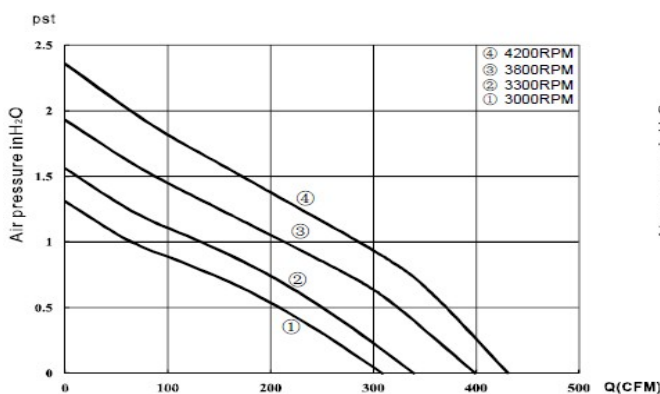



CFD19062 Series

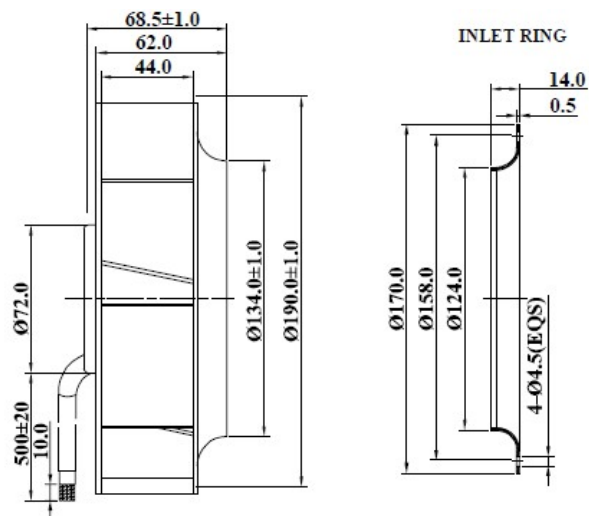


Size	Ø190X 62mm
Impeller	Plastic PP
Motor	DC Brushless External Rotor Motor
Insulation	Class B
Technical Features	Control input 0-10VDC/PWM, Tach output, Locked rotor protection, reverse polarity, Current limited, soft start
Weight	0.83kg

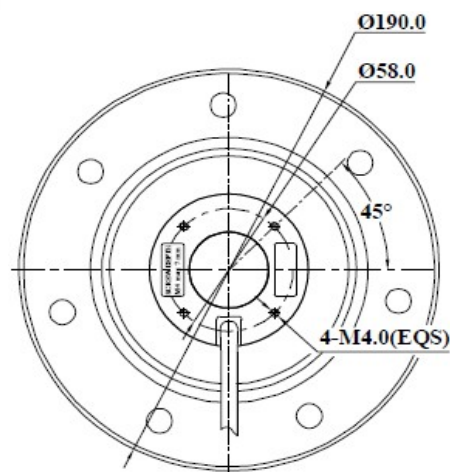

Model Number	Voltage	Operating Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)
CFD19062V24BHWPB	24	16 ~ 28	3.6	86.4	3000	373.9	42.9	66
CFD19062V48BHWPB	48	36 ~ 56	1.8	86.4	3000	373.9	42.9	66

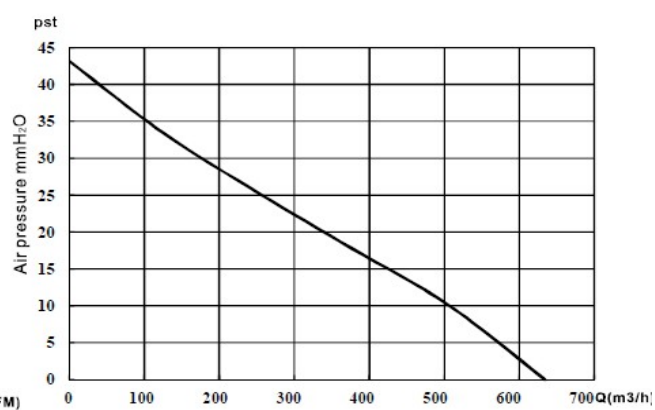
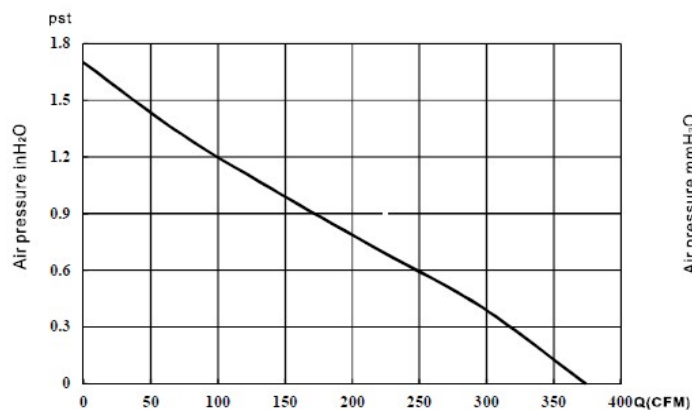


CFD22063 Series

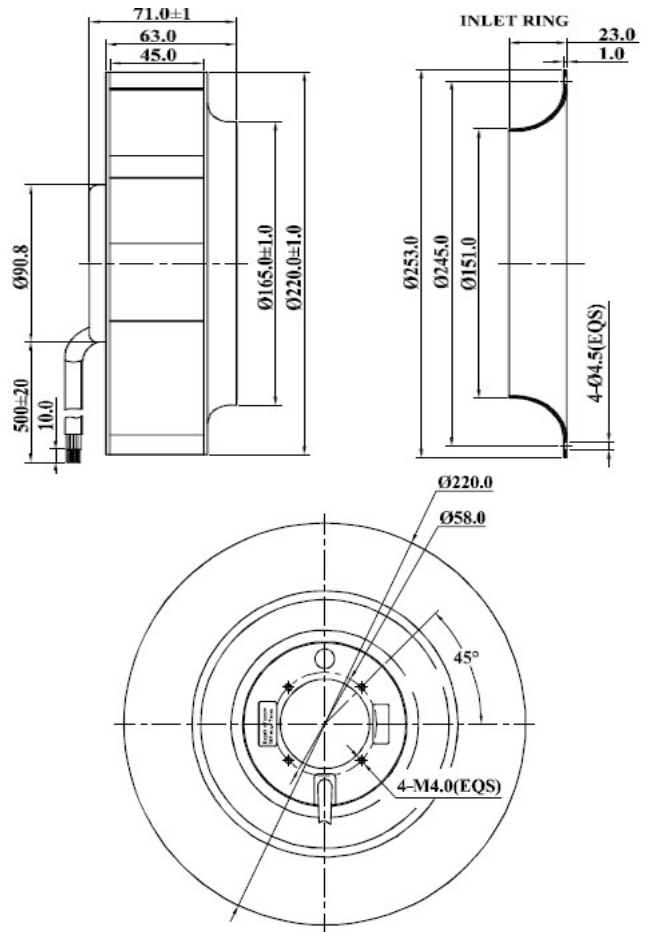


Size	Ø220X 63mm
Impeller	Plastic PP
Motor	DC Brushless External Rotor Motor
Insulation	Class B
Technical Features	Control input 0-10VDC/PWM, Tach output, Locked rotor protection, reverse polarity, Current limited, soft start
Weight	1.4kg

Model Number	Voltage	Operating Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)
CFD22063V24BHWBP	24	16 ~ 28	3.5	84	2800	488.3	45.5	65
CFD22063V48BHWBP	48	36 ~ 56	1.7	81.6	2800	488.3	45.5	65

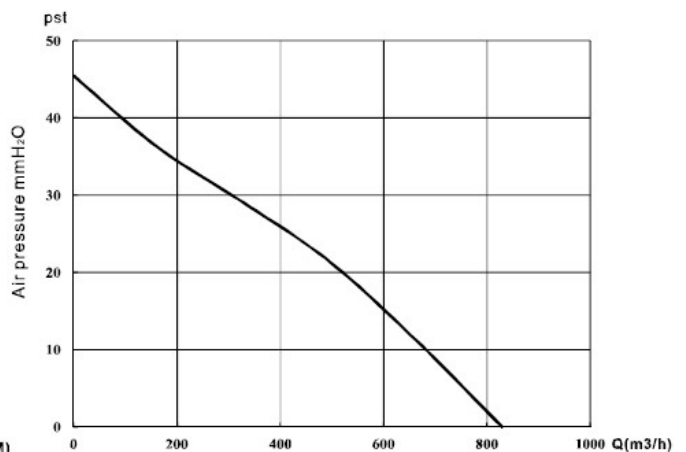
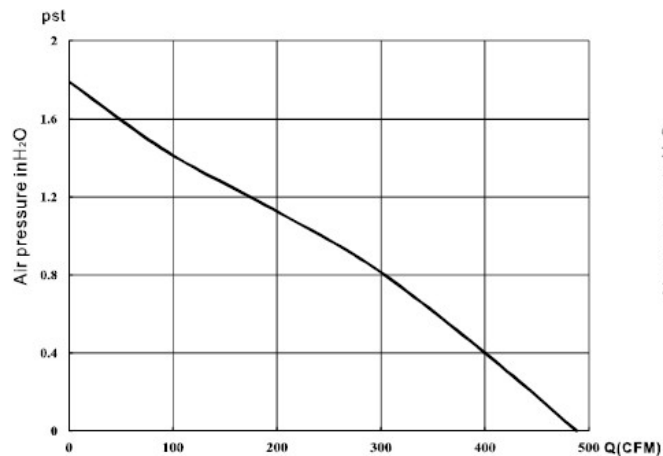


CFD22590 Series

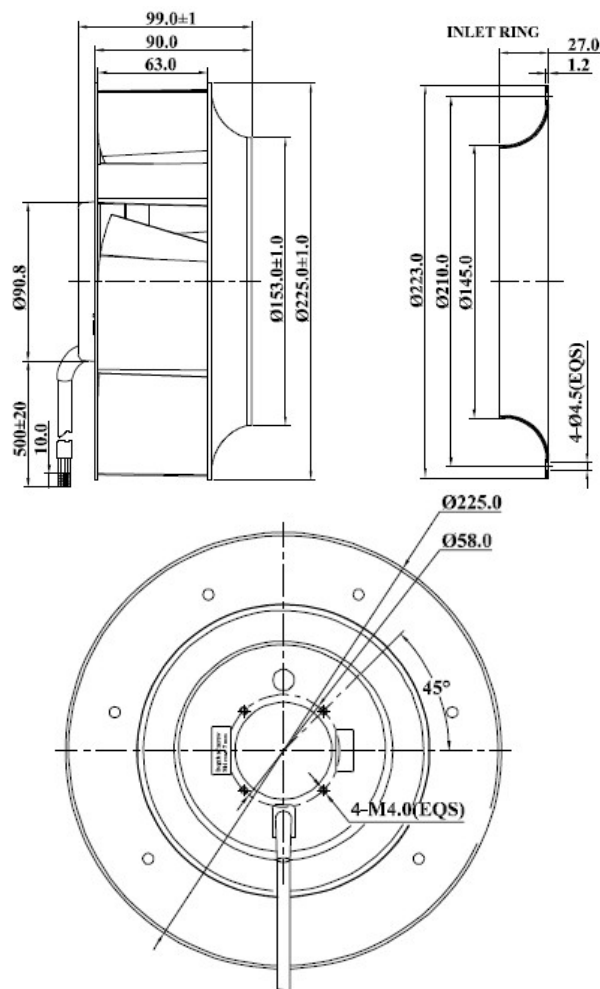


Size	Ø225X 90mm
Impeller	Plastic PP
Motor	DC Brushless External Rotor Motor
Insulation	Class B
Technical Features	Control input 0-10VDC/PWM, Tach output, Locked rotor protection, reverse polarity, Current limited, soft start
Weight	1.51kg


Model Number	Voltage	Operating Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)
CFD22590V24BHWPB	24	16 ~ 28	4.5	108	2600	687.9	50.47	68
CFD22590V48BHWPB	48	36 ~ 56	2.4	115.2	2600	687.9	50.47	68

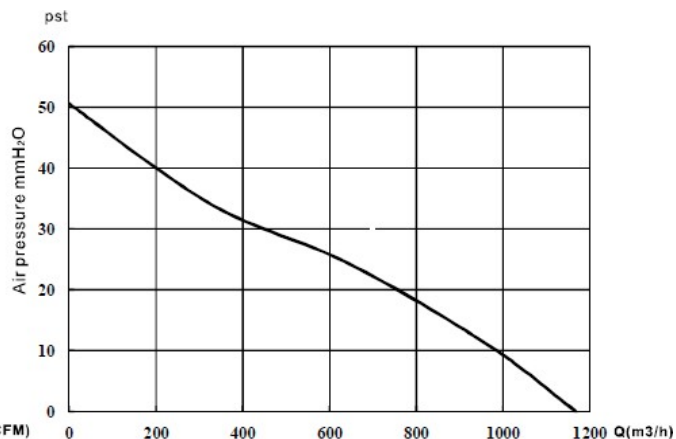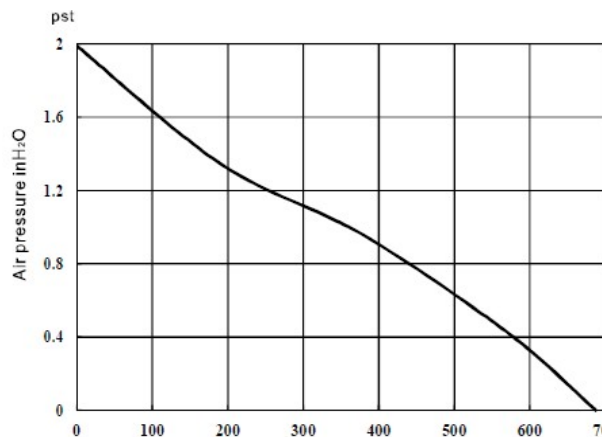



CFD25080 Series

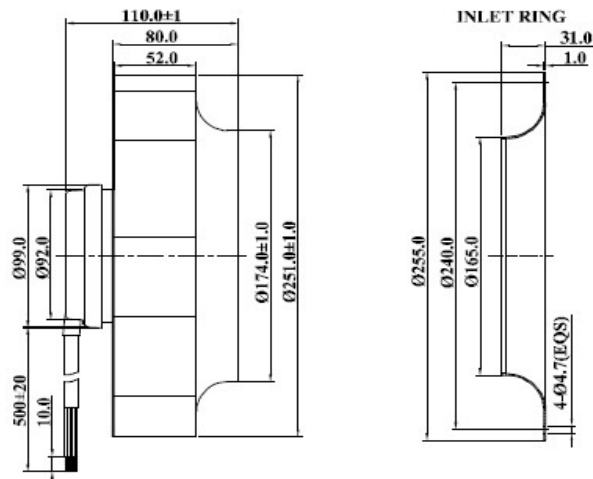


Size	Ø250X 80mm
Impeller	Metal Sheet
Motor	DC Brushless External Rotor Motor
Insulation	Class B
Technical Features	Control input 0-10VDC/PWM, Tach output, Locked rotor protection, reverse polarity, Current limited, soft start
Weight	2.25kg

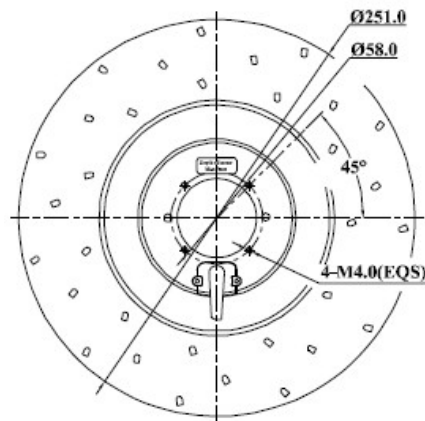


Model Number	Voltage	Operating Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)
CFD25080V24BHWPB	24	16 ~ 28	5.4	129.6	2600	790.4	56.46	70
CFD25080V48BHWPB	48	36 ~ 56	3	144	2600	790.4	56.46	70

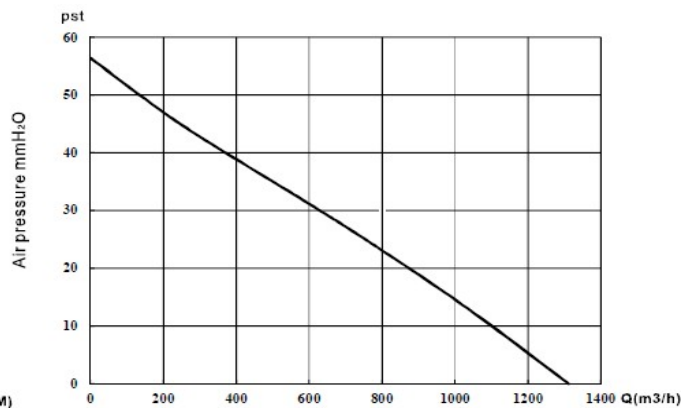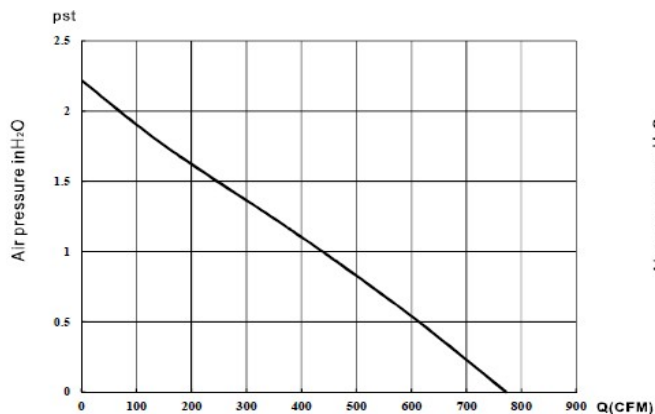



CFD280112 Series

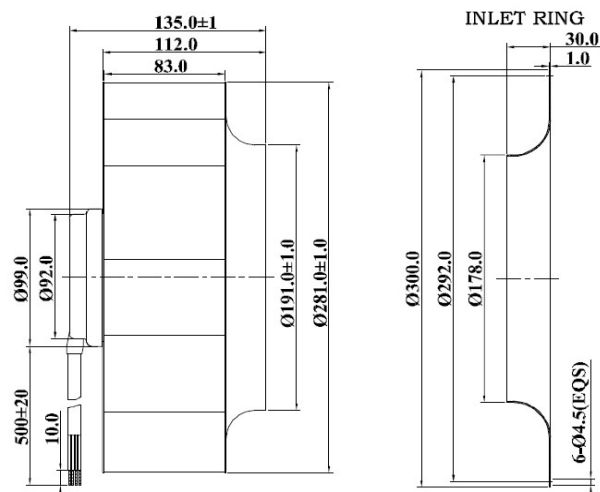

Size	Ø280X 112mm
Impeller	Metal Galvanized Sheet
Motor	DC Brushless External Rotor Motor
Insulation	Class B
Technical Features	Control input 0-10VDC/PWM, Tach output, Locked rotor protection, reverse polarity, Current limited, soft start
Weight	2.76kg

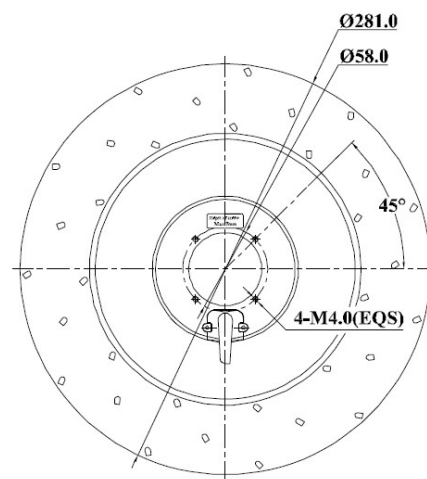


Model Number	Voltage	Operating Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH2O)	dB(A)
CFD280112V24BHWPB	24	16 ~ 28	3.8	91.2	1700	1002	41.9	66
CFD280112V48BHWPB	48	36 ~ 56	2.2	105.6	1700	1002	41.9	66

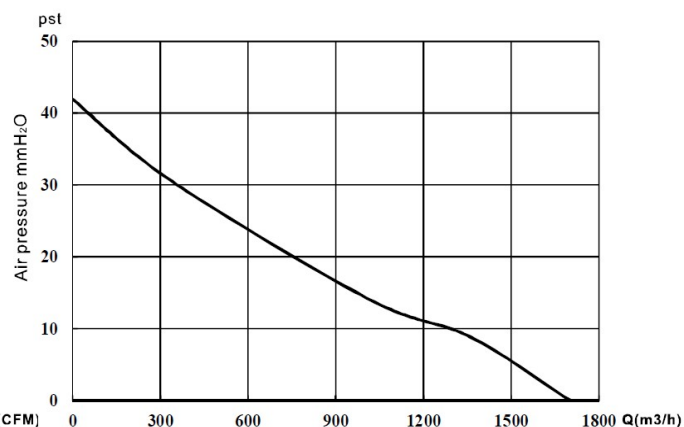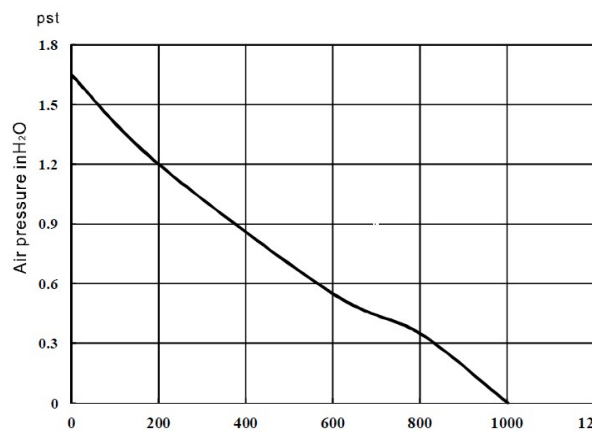



CFD281112 Series




Size	Ø281X 112mm
Impeller	Metal aluminum Sheet
Motor	DC Brushless External Rotor Motor
Insulation	Class B
Technical Features	Control input 0-10VDC/PWM, Tach output, Locked rotor protection, reverse polarity, Current limited, soft start
Weight	3.2kg

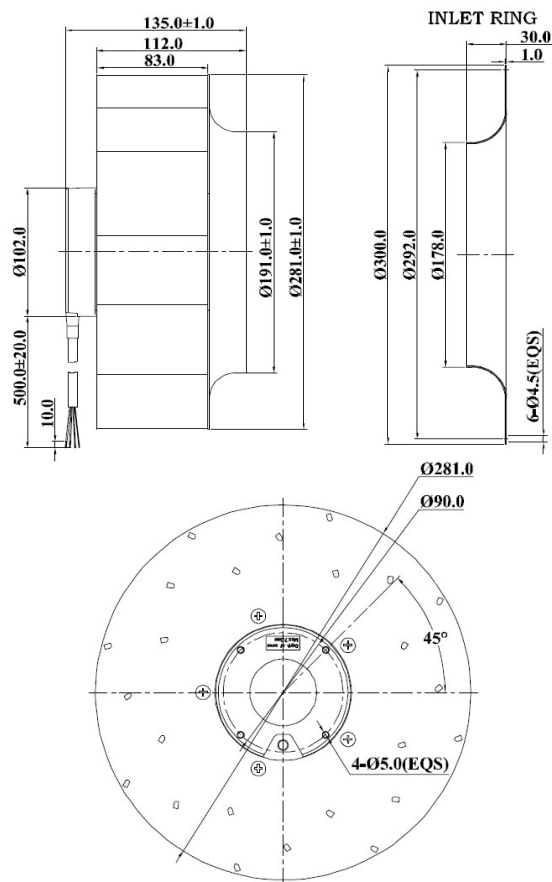

Model Number	Voltage	Operating Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH2O)	dB(A)
CFD281112V24BHWPB	24	36 ~ 56	5.2	250	2300	1301	61	72

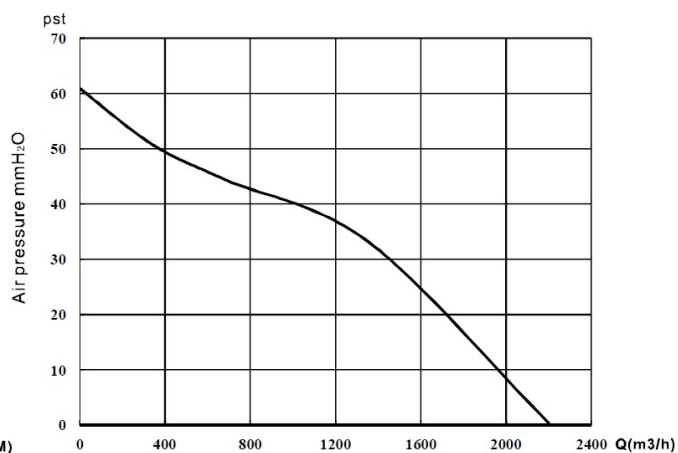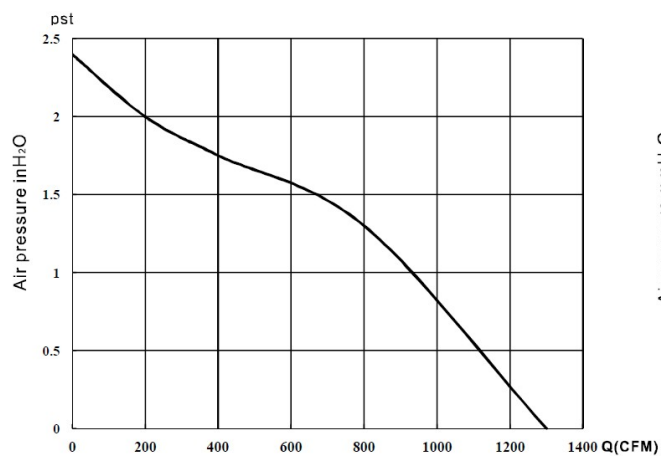


CFD316107-BM Series

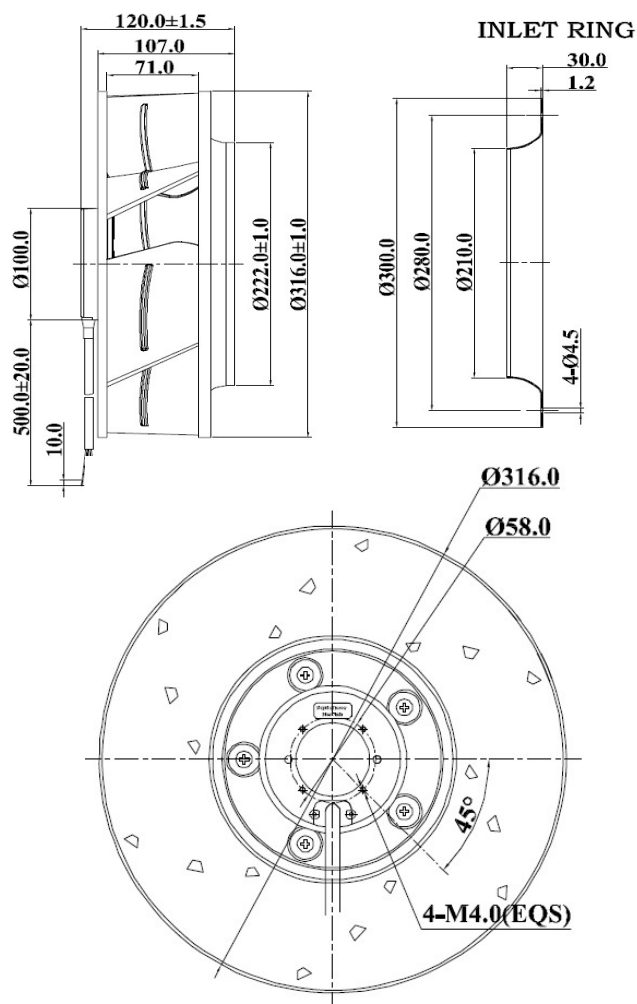


Size	$\varnothing 316 \times 107 \text{mm}$
Impeller	Metal aluminum Sheet
Motor	DC Brushless External Rotor Motor
Insulation	Class B
Technical Features	Control input 0-10VDC/PWM, Tach output, Locked rotor protection, reverse polarity, Current limited, soft start
Weight	2.63kg

Model Number	Voltage	Operating Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)
CFD316107V24BMWPB	24	16 ~ 28	5	120	1600	1044.3	45.48	64
CFD316107V48BMWPB	48	36 ~ 56	2.5	120	1600	1044.3	45.48	64


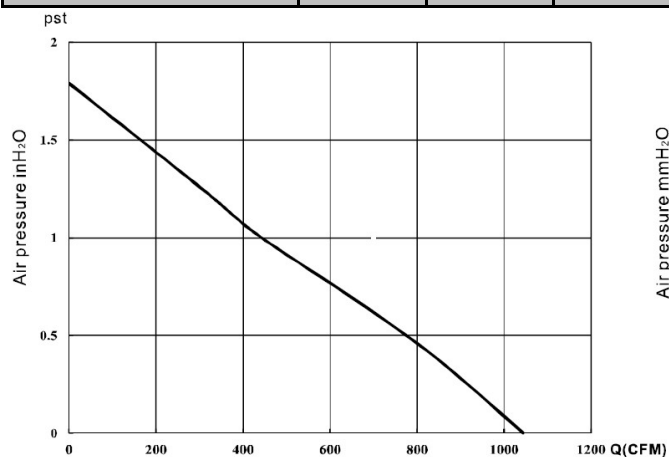


CFD316107-BH Series

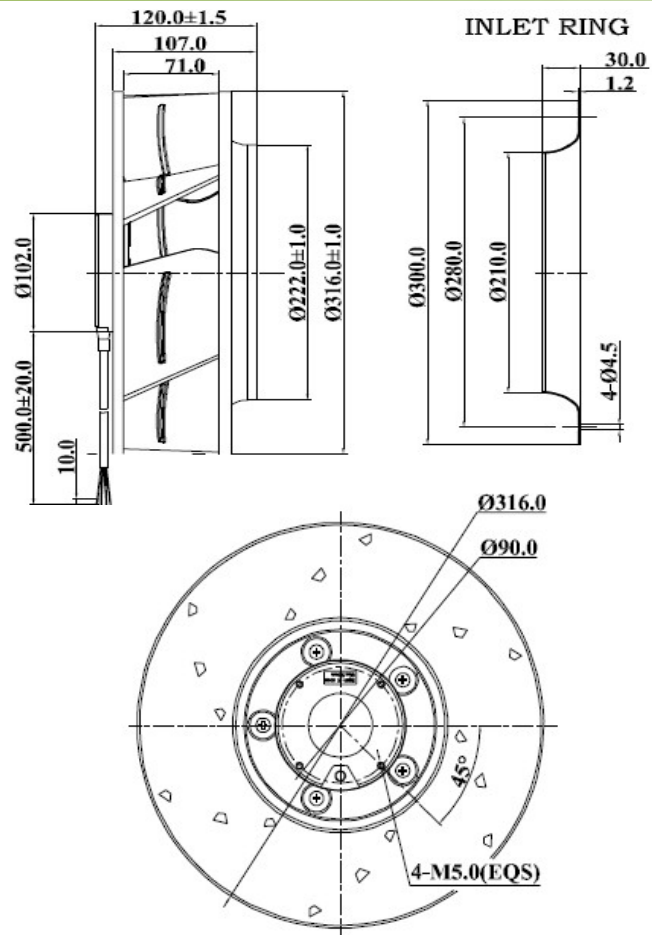


Size	Ø316X 107mm
Impeller	Metal aluminum Sheet
Motor	DC Brushless External Rotor Motor
Insulation	Class B
Technical Features	Control input 0-10VDC/PWM, Tach output, Locked rotor protection, reverse polarity, Current limited, soft start
Weight	3.5kg

Model Number	Voltage	Operating Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)
CFD316107V48BHPB	48	36 ~ 56	4.8	230.4	2000	1320	61.3	67

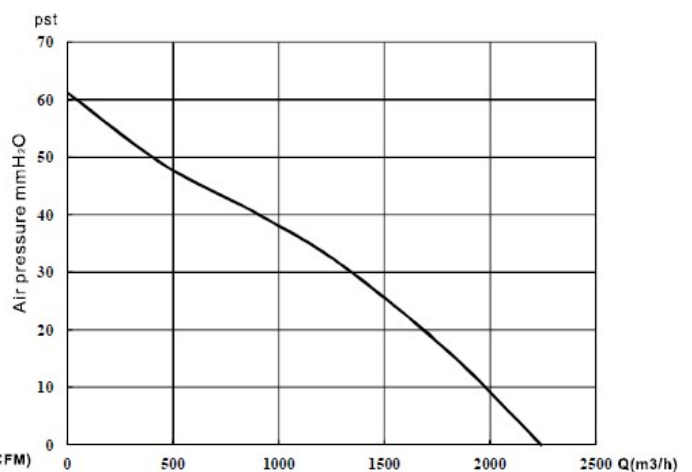
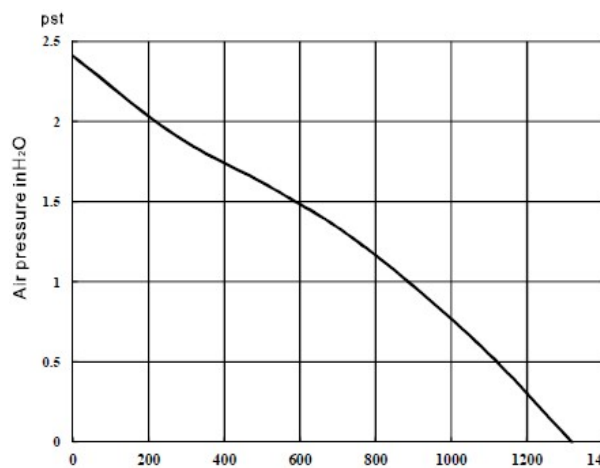


CFD316137-BM Series

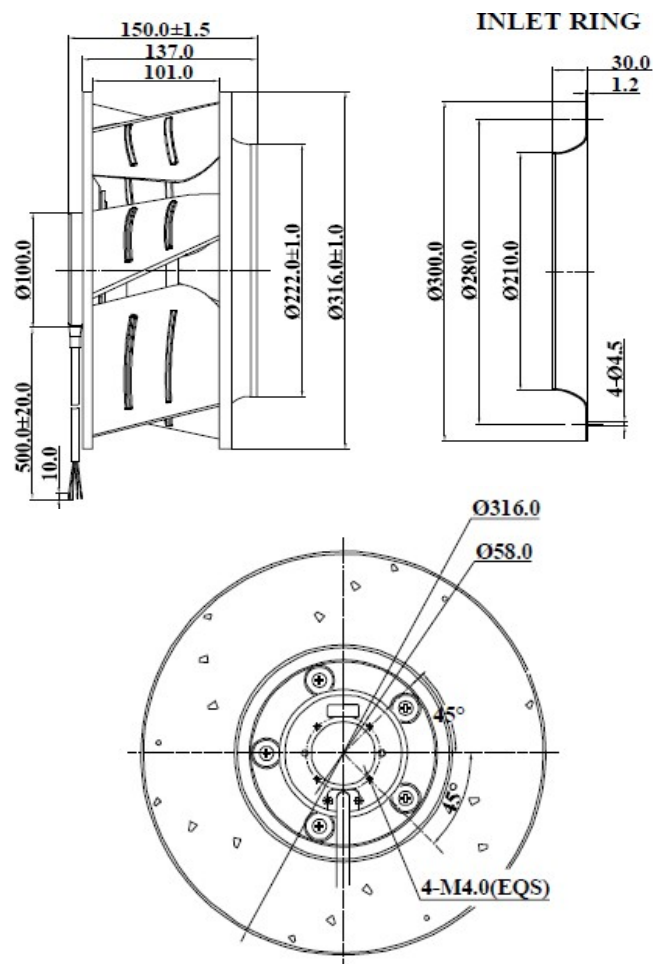

Size	Ø316X 137mm
Impeller	Metal aluminum Sheet
Motor	DC Brushless External Rotor Motor
Insulation	Class B
Technical Features	Control input 0-10VDC/PWM, Tach output, Locked rotor protection, reverse polarity, Current limited, soft start
Weight	2.88kg


Model Number	Voltage	Operating Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)
CFD316137V24BMWPB	24	16 ~ 28	5.6	124.8	1600	1248.5	43.51	64
CFD316137V48BMWPB	48	36 ~ 56	2.8	124.8	1600	1248.5	43.51	64

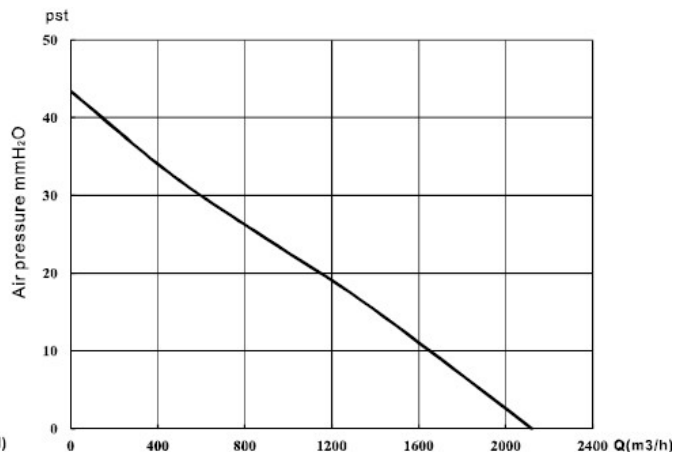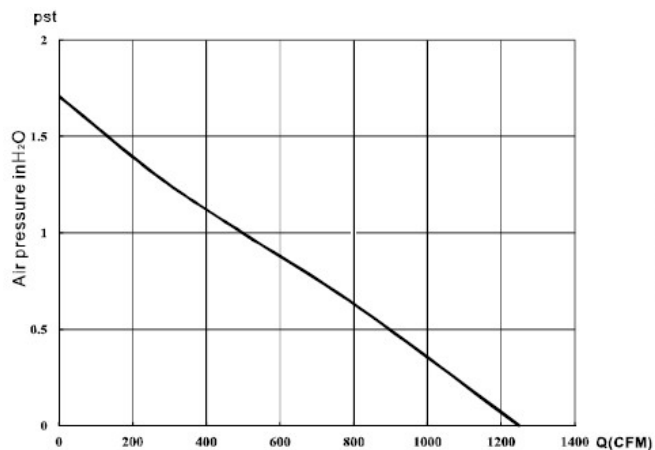



CFD316137-BH Series




Size	Ø316X 137mm
Impeller	Metal aluminum Sheet
Motor	DC Brushless External Rotor Motor
Insulation	Class B
Technical Features	Control input 0-10VDC/PWM, Tach output, Locked rotor protection, reverse polarity, Current limited, soft start
Weight	3.6kg

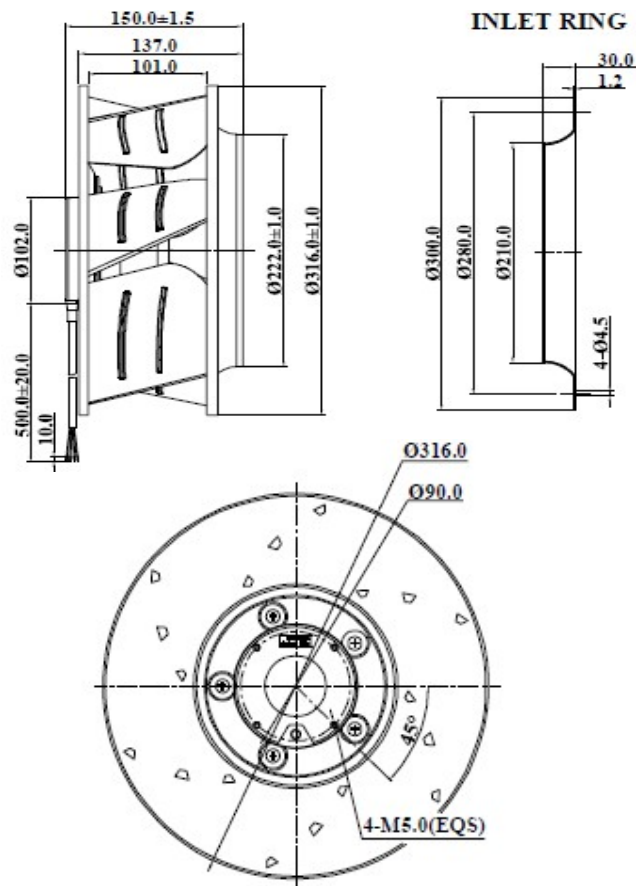


Model Number	Voltage	Operating Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)
CFD316137V48BHWPB	48	36 ~ 56	5.4	259.2	2000	1540	62.18	70

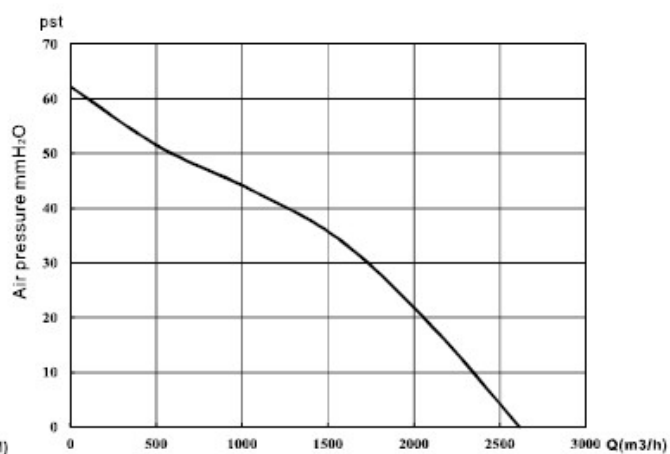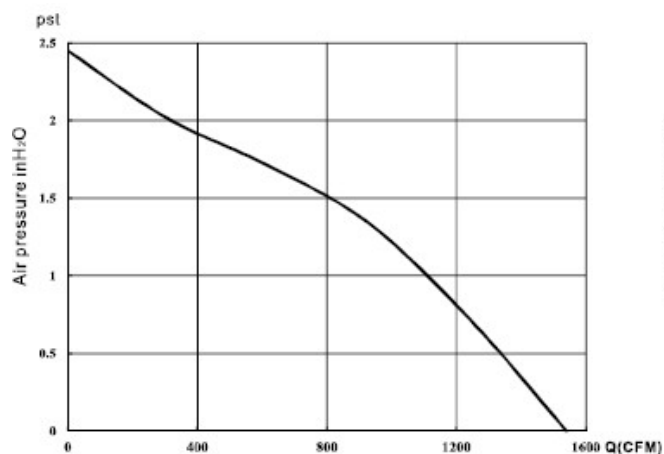



CFD355143 Series

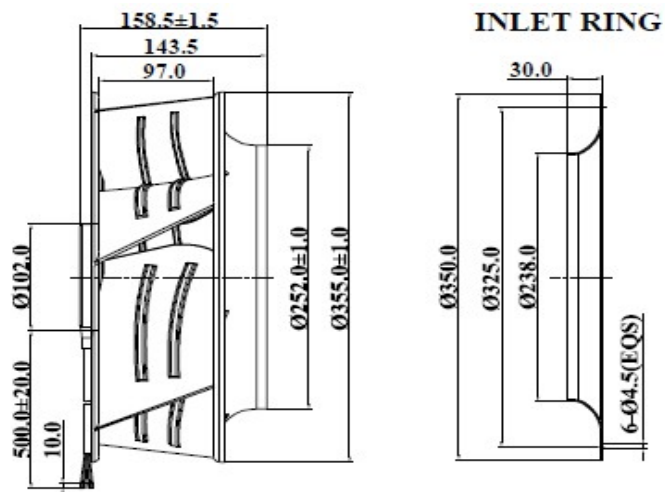


Size	Ø355X 143mm
Impeller	Metal aluminum Sheet
Motor	DC Brushless External Rotor Motor
Insulation	Class B
Technical Features	Control input 0-10VDC/PWM, Tach output, Locked rotor protection, reverse polarity, Current limited, soft start
Weight	3.79kg

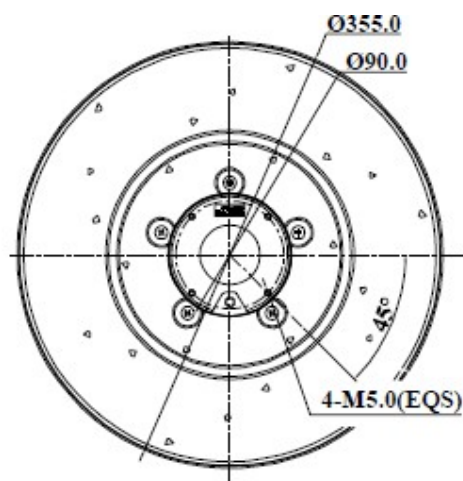

Model Number	Voltage	Operating Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH2O)	dB(A)
CFD355143V48BHWPB	48	36 ~ 56	4.3	206.4	1560	1619	54.22	69

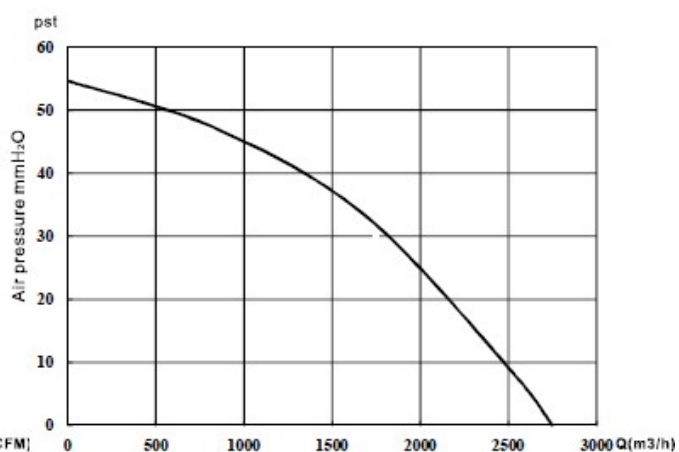
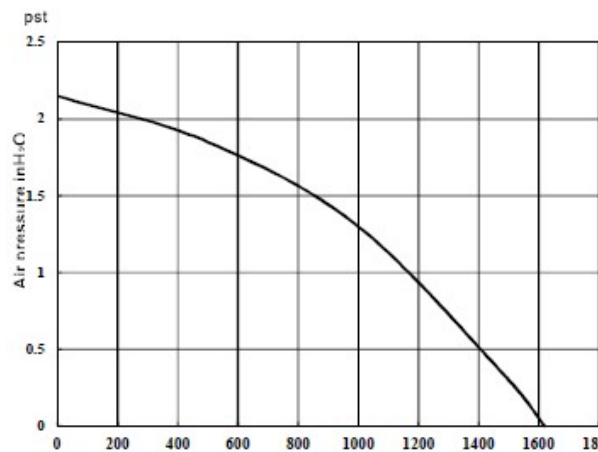


CFD355167 Series

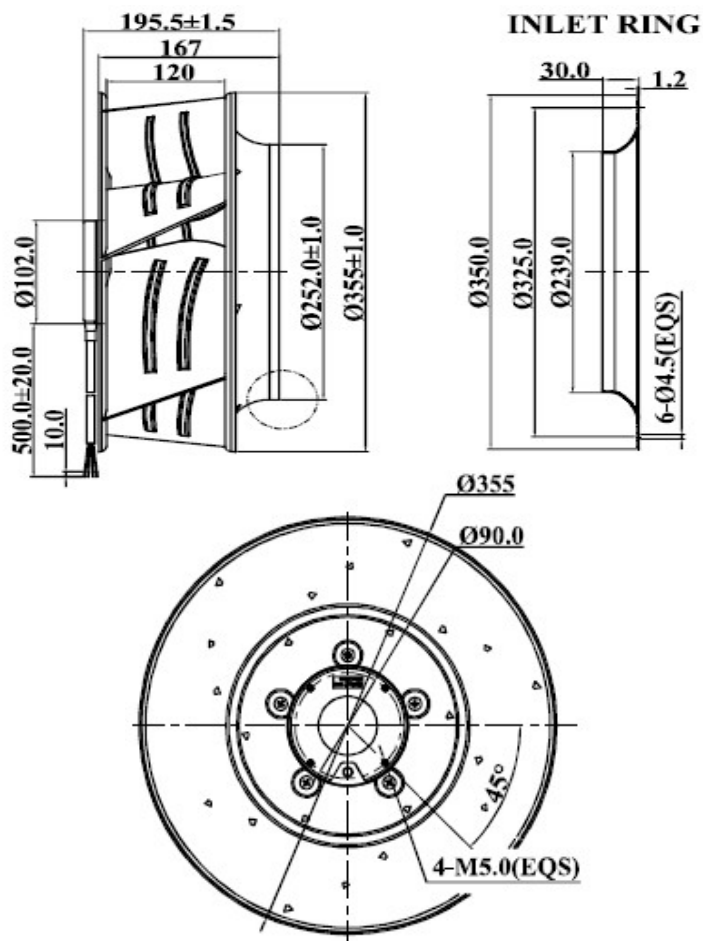


Size	Ø355X 167mm
Impeller	Metal aluminum Sheet
Motor	DC Brushless External Rotor Motor
Insulation	Class B
Technical Features	Control input 0-10VDC/PWM, Tach output, Locked rotor protection, reverse polarity, Current limited, soft start
Weight	4.5kg

Model Number	Voltage	Operating Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)
CFD355167V48BHWPB	48	36 ~ 56	5.8	278.4	1650	2006	56.4	76

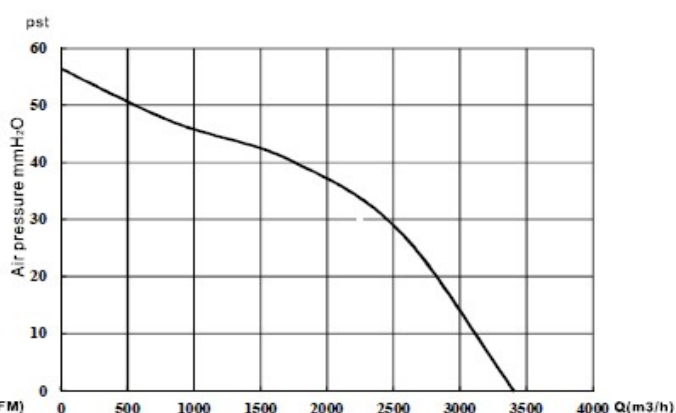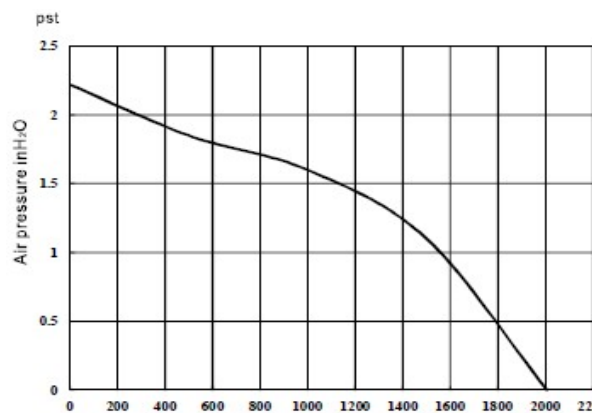

CFD404141 Series

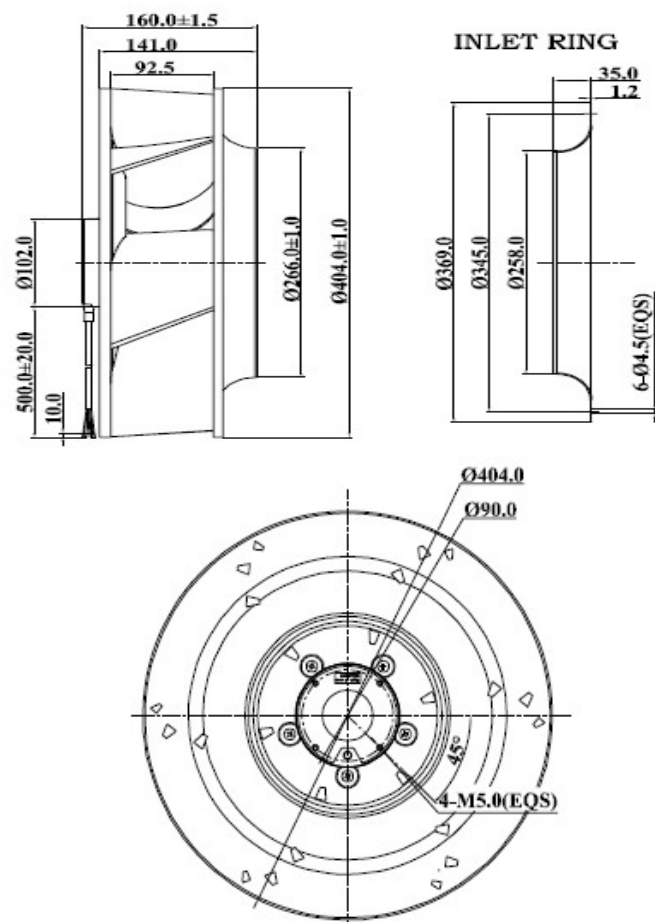

Size	Ø404X 141mm
Impeller	Metal aluminum Sheet
Motor	DC Brushless External Rotor Motor
Insulation	Class B
Technical Features	Control input 0-10VDC/PWM, Tach output, Locked rotor protection, reverse polarity, Current limited, soft start
Weight	4.75kg

Model Number	Voltage	Operating Voltage	Current	Power	Speed	Air Flow	Pressure	Noise
	(V)	(V)	(A)	(W)	(RPM)	(CFM)	(mmH ₂ O)	dB(A)
CFD404141V48BHWPB	48	36 ~ 56	5.8	278.4	1450	2022	67.64	68

